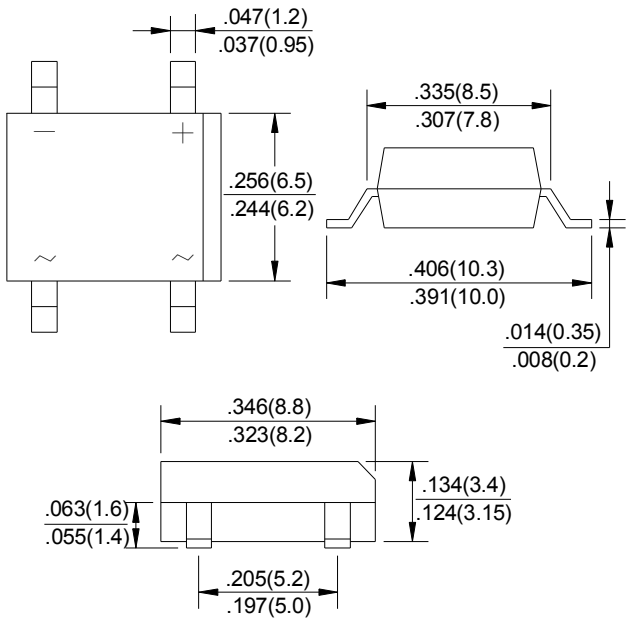


VI. Bridge Rectifier

**1.0A SMD Glass Passivated Bridge Rectifier
DB101GS~DB107GS**

(Package: DBS)

<p><u>FEATURES</u></p> <ul style="list-style-type: none"> • Rating to 1000V PRV • Ideal for printed circuit board • Low forward voltage drop, high current capability • Reliable low cost construction utilizing molded plastic technique results in inexpensive product • The plastic material has Underwriters Laboratory Flammability Classification 94V-0 <p><u>MECHANICAL DATA</u></p> <ul style="list-style-type: none"> • Polarity : As marked on body • Mounting position : Any • Weight : 0.02 ounces, 0.38 grams 	 <p style="text-align: center;">Case: DBS Dimensions in inches and (millimeters)</p>
--	---

Ratings & Electrical Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20%.

Characteristic	Symbol	DB								Units
		101GS	102GS	103GS	104GS	105GS	106GS	107GS		
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts	
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	Volts	
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	Volts	
Maximum average forward rectified current @ $T_a = 40$	I_o	1.0								Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	30								Amps
Maximum forward voltage at 1.0A DC	V_F	1.1								Volts
Maximum DC reverse current @ $T_j=25$ at rated DC blocking voltage @ $T_j=125$	I_R	10 500								μA
I^2t Rating for Fusing ($t < 8.3ms$)	I^2t	10.4								A^2s
Typical junction capacitance per element (Note 1)	C_j	25								PF
Typical thermal resistance (Note 2)	R_{th-JA}	40								/ W
Operating temperature range	T_j	-55 to +150								
Storage temperature range	T_{stg}	-55 to +150								

Note:
1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC
2. Thermal resistance from junction to ambient mounted on P.C.B with 0.5*0.5" (13*13mm) copper pads

Ratings and Characteristic Curves of DB101GS~DB107GS

FIG.1-FORWARD CURRENT DERATING CURVE

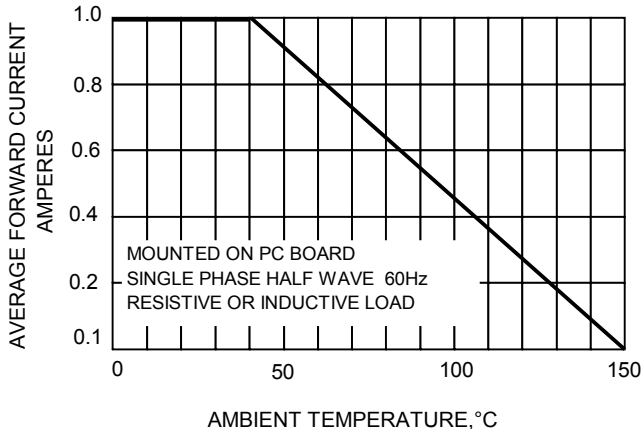


FIG.2-MAXIMUM NON-REPETITIVE SURGE CURRENT

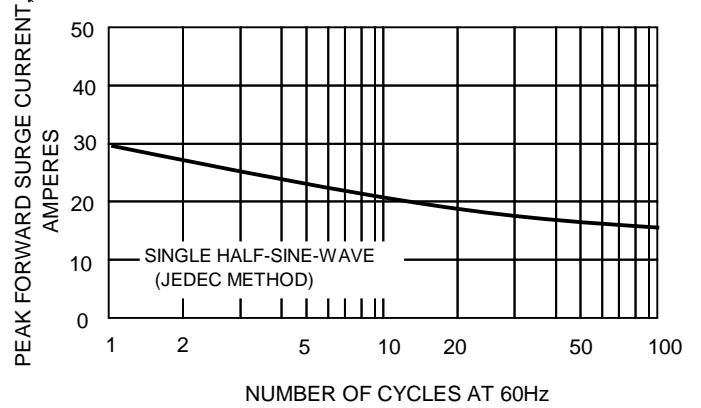


FIG.3-TYPICAL JUNCTION CAPACITANCE

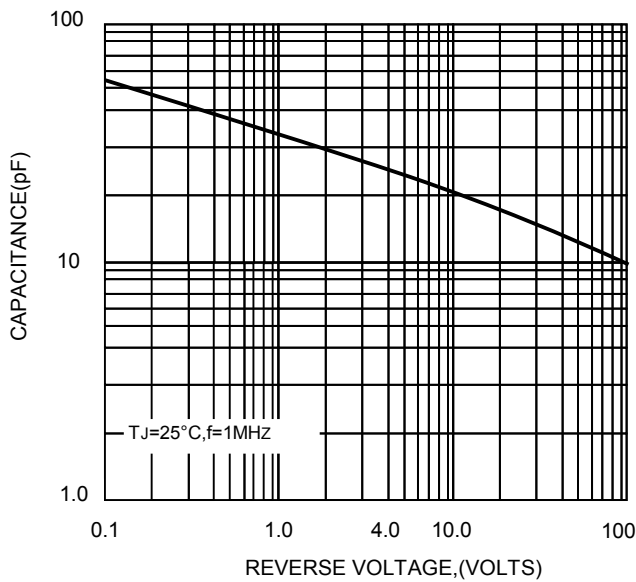


FIG.4-TYPICAL FORWARD CHARACTERISTICS

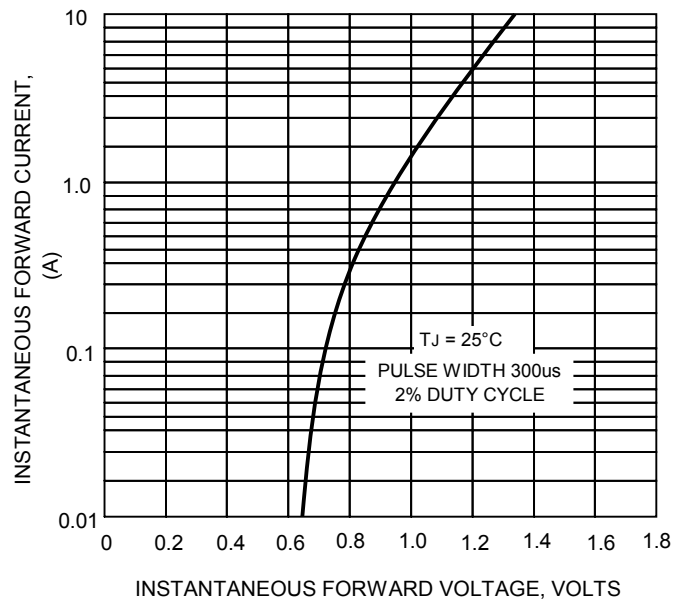


FIG.5-TYPICAL REVERSE CHARACTERISTICS

