

VI. Bridge Rectifier

**2.0A Glass Passivated Bridge Rectifier
KBPM2005G~KBPM210G**

(Package: KBPM)

<p><u>FEATURES</u></p> <ul style="list-style-type: none"> Surge overload rating – 50 amperes peak Ideal for printed circuit board Plastic material has Underwriters Laboratory Flammability Classification 94V-0 Mounting position: Any <p><u>MECHANICAL DATA</u></p> <ul style="list-style-type: none"> Case : Molded plastic body Polarity : Polarity symbols marked on case Handling Precautions : None Weight : 1.46 grams 	<p>Case: KBPM Dimensions in inches and (millimetres)</p>
--	--

Ratings & Electrical Characteristics

Characteristics	Symbol	KBPM 2005G	KBPM 201G	KBPM 202G	KBPM 204G	KBPM 206G	KBPM 208G	KBPM 210G	Units
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Bridge input voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified output current @ $T_a = 50$	I_o	2.0							Amps
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	50.0							Amps
Maximum forward voltage drop per bridge element at 2.0A peak	V_F	1.1							Volts
Maximum reverse current at rated DC blocking voltage per element	I_R	10.0							μA
Maximum reverse current at rated DC blocking voltage per element $T_j = 100$	I_R	1.0							mA
Operating temperature range	T_j	-55 to +150							
Storage temperature range	T_{stg}	-55 to +150							

Ratings and Characteristic Curves of KBPM2005G~KBPM210G

FIG.1-FORWARD CURRENT DERATING CURVE

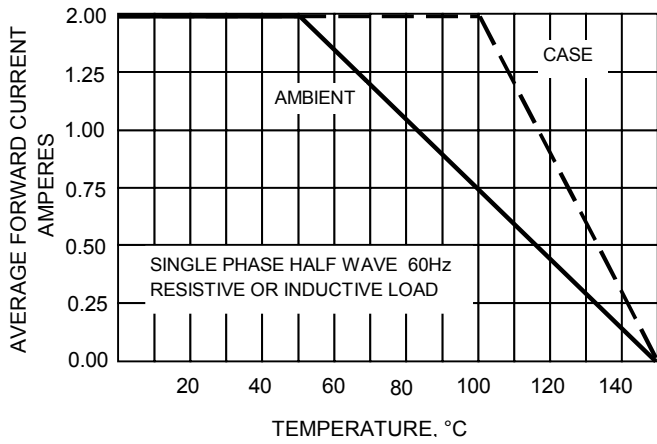


FIG.2-MAXIMUM NON-REPETITIVE SURGE CURRENT

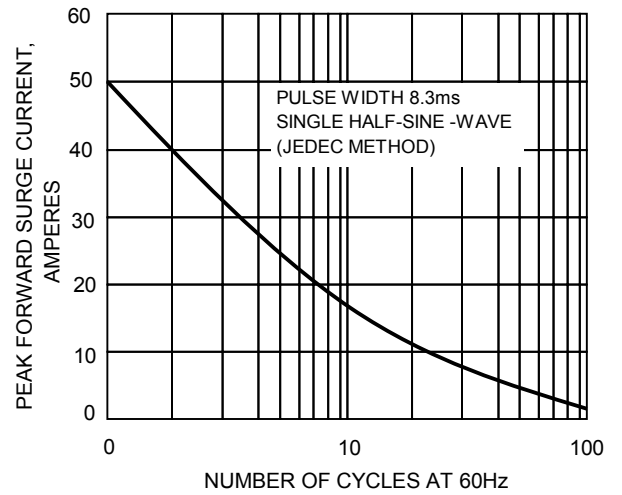


FIG.3-TYPICAL JUNCTION CAPACITANCE

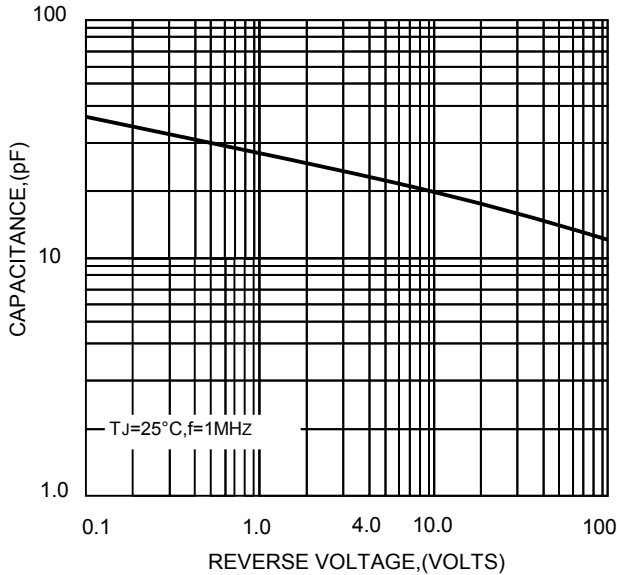


FIG.4-TYPICAL FORWARD CHARACTERISTICS

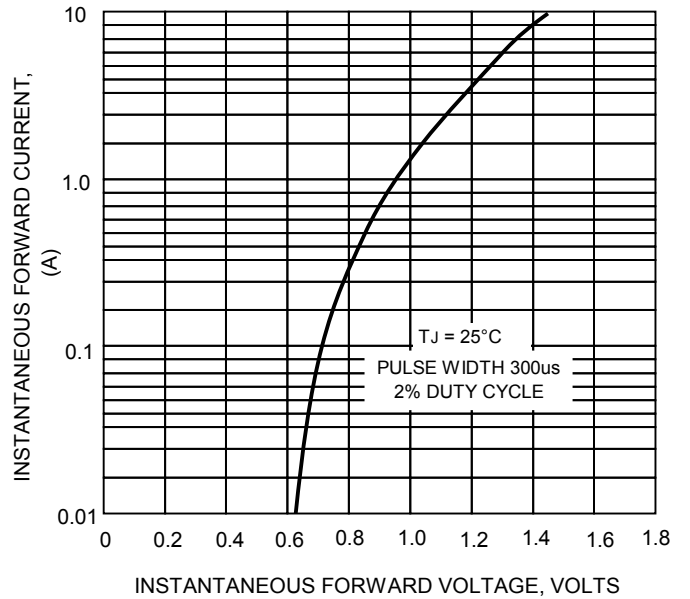


FIG.5-TYPICAL REVERSE CHARACTERISTICS

