

III. Fast / Ultra Fast / Super Fast Recovery Rectifier

3.0A Surface Mount Fast Recovery Rectifier

RS3AB~RS3MB


(Package: SMB (DO-214AA))

FEATURES

- For surface mounted applications.
- Glass passivated junction chip.
- Built-in strain relief, ideal for automated placement.
- Plastic material used carries Underwriters Laboratory Flammability Classification 94V-0.
- Fast switching for high efficiency.
- High temperature soldering : 260 /10 seconds at terminals.

MECHANICAL DATA

- Case : Molded plastic
- Terminals : Solder plated
- Polarity : Indicated by cathode band
- Weight : 0.090 grams

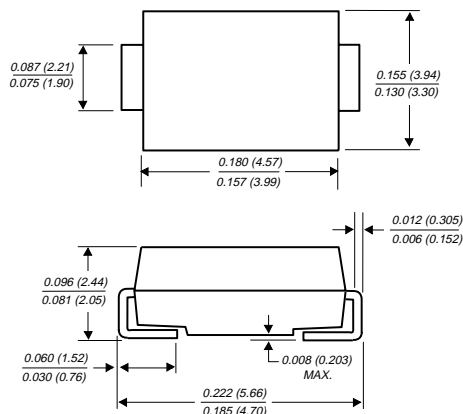

Case: SMB
Dimensions in inches and (millimetres)

Ratings & Electrical Characteristics

Ratings at 25 ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20%.

Characteristics	Symbol	RS3AB	RS3BB	RS3DB	RS3GB	RS3JB	RS3KB	RS3MB	Units
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified current See Fig. 1 @ $T_L=110$	I_o	3.0							Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load. (JEDEC Method)	I_{FSM}	100							Amps
Maximum instantaneous forward voltage @ 3.0 A	V_F	1.3							Volts
Maximum DC reverse current @ $T_a = 25$ at rated DC blocking voltage @ $T_a = 125$	I_R	10 200							μA
Maximum reverse recovery time (Note 1)	T_{rr}	150			250		500		ns
Typical junction capacitance (Note 2)	C_j	60							PF
Typical thermal resistance (Note 3)	R_{th-JA} R_{th-JL}	50.0 15.0							$^{\circ}W$
Operating temperature range	T_j	-55 to +150							
Storage temperature range	T_{stg}	-55 to +150							

Notes:

1. Reverse recovery test conditions: $I_F=0.5A$, $I_R=1.0A$, $I_{RR}=0.25A$
2. Measured at 1.0 MHz and applied $V_R=4.0V$.
3. Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.6"x0.6" (16x16mm) copper pad areas.

Ratings and Characteristic Curves of RS3AB~RS3MB

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

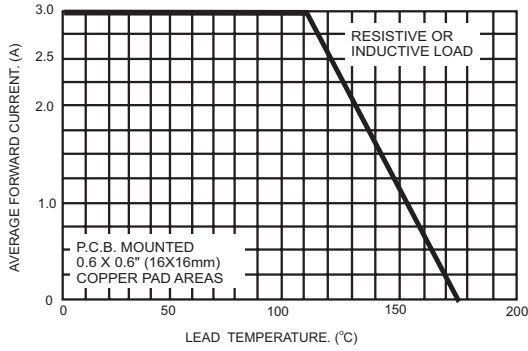


FIG.2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

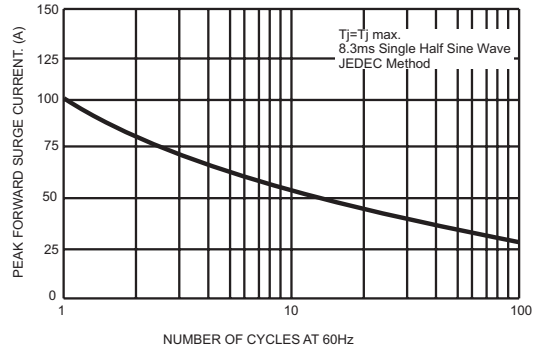


FIG.3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

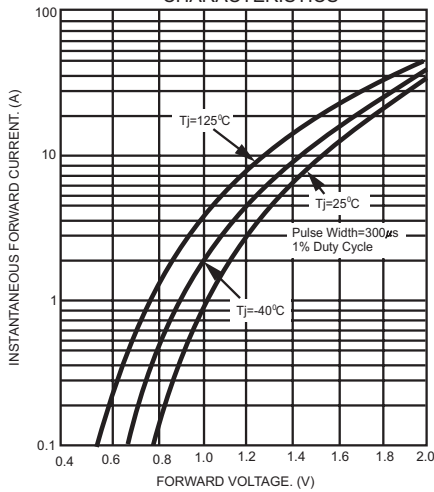


FIG.4- TYPICAL REVERSE CHARACTERISTICS

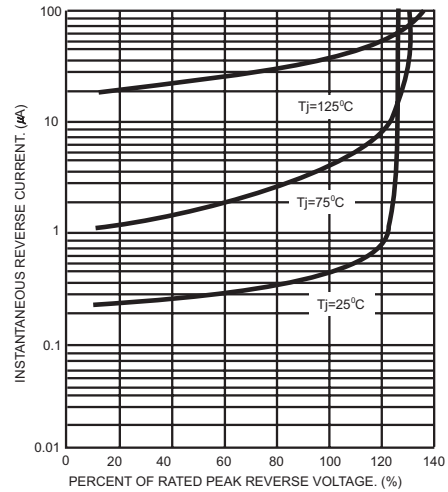


FIG.5- TYPICAL JUNCTION CAPACITANCE

