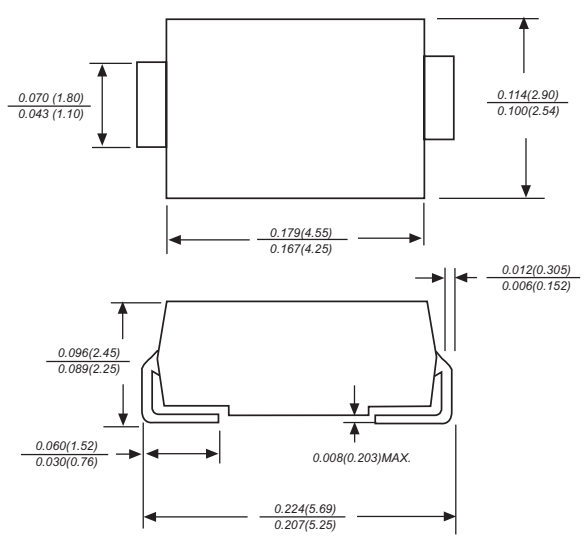


### III. Fast / Ultra Fast / Super Fast Recovery Rectifier

#### 1.0A Surface Mount Ultra Fast Recovery Rectifier

#### US1A~US1M

(Package: SMA (DO-214AC))

<p><b><u>FEATURES</u></b></p> <ul style="list-style-type: none"> <li>• The plastic package carries Underwriters Laboratory Flammability Classification 94V-0</li> <li>• For surface mounted applications</li> <li>• Ultra fast switching for high efficiency</li> <li>• Low reverse leakage</li> <li>• Built-in strain relief, ideal for automated placement</li> <li>• High forward surge current capability</li> <li>• High temperature soldering guaranteed : 250 /10 seconds at terminals</li> </ul> <p><b><u>MECHANICAL DATA</u></b></p> <ul style="list-style-type: none"> <li>• Case : JEDEC DO-214AC molded plastic body</li> <li>• Terminals : Solder plated, solderable per MIL-STD-750, Method 2026</li> <li>• Polarity : Color band denotes cathode end</li> <li>• Mounting Position : Any</li> <li>• Weight : 0.083 grams</li> </ul>	 <p>Case: SMA Dimensions in inches and (millimeters)</p>
---	--

### Ratings & Electrical Characteristics

Ratings at 25 ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20%.

Characteristics	Symbol	US1A	US1B	US1D	US1G	US1J	US1K	US1M	Units
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified current at $T_L = 90$	$I_o$	1.0							Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	30.0							Amps
Maximum instantaneous forward voltage at 1.0A	$V_F$	1.0		1.3		1.7		Volts	
Maximum DC reverse current at rated DC blocking voltage	$I_R$			5.0				$\mu A$	
Maximum reverse recovery time (Note 1)	$T_{rr}$	50			75			ns	
Typical junction capacitance (Note 2)	$C_j$	15.0							PF
Typical thermal resistance (Note 3)	$R_{th-JA}$	50.0							/ W
Operating junction and storage temperature range	$T_j, T_{stg}$	-65 to +150							

Note :

1. Reverse recovery conditions:  $I_F = 0.5A, I_R = 1.0A, I_{RR} = 0.25A$
2. Measured at 1.0 MHz and applied reverse voltage of 4.0 volts DC
3. P.C.B. mounted with 0.2 x 0.2" (5.0 x 5.0mm) copper pad areas

# Ratings and Characteristic Curves of US1A~US1M

