

II. Schottky Rectifier

3.0A Schottky Rectifier

1N5820~1N5822

(Package: DO-201AD)

<p>FEATURES</p> <ul style="list-style-type: none"> Plastic package has Underwriters Laboratory Flammability Classification 94V-0 Metal silicon junction, majority carrier conduction Guardring for overvoltage protection Low power loss, high efficiency High current capability, low forward voltage drop High surge capability For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications High temperature soldering guaranteed : 250 °C /10 seconds, 0.375"(9.5mm) lead length, 5 lbs. (2.3Kg) tension <p>MECHANICAL DATA</p> <ul style="list-style-type: none"> Case : JEDEC DO-201AD molded plastic body Terminals : Plated axial leads, solderable per MIL-STD-750, Method 2026 Polarity : Color band denotes cathode end Mounting Position : Any Weight : 0.04 ounce, 1.10 grams 	<p>Case: DO-201AD Dimensions in inches and (millimeters)</p>
--	--

Ratings & Electrical Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20%.

Characteristic	Symbol	1N5820	1N5821	1N5822	Units
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	Volts
Maximum RMS voltage	V _{RMS}	14	21	28	Volts
Maximum DC blocking voltage	V _{DC}	20	30	40	Volts
Maximum average forward rectified current 0.375" (9.5mm) lead length at T _L = 95	I _O		3.0		Amps
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}		80.0		Amps
Maximum instantaneous forward voltage at 3.0A	V _F	0.475	0.500	0.525	Volts
Maximum DC reverse current Ta = 25 at rated DC blocking voltage Ta = 100	I _R		2.0 40.0		mA
Typical junction capacitance (Note 1)	C _j		300.0		PF
Typical thermal resistance (Note 2)	R _{th-JA}		40.0		/ W
Operating junction and storage temperature range	T _j , T _{stg}		- 65 to +125		

Notes:

1. Measured at 1.0 MHz and applied reverse voltage of 4.0 volts D.C.

2. Thermal resistance from junction to ambient 0.375"(9.5mm) lead length P.C.B. mounted

Ratings and Characteristic Curves of 1N5820~1N5822

FIG. 1- FORWARD CURRENT DERATING CURVE

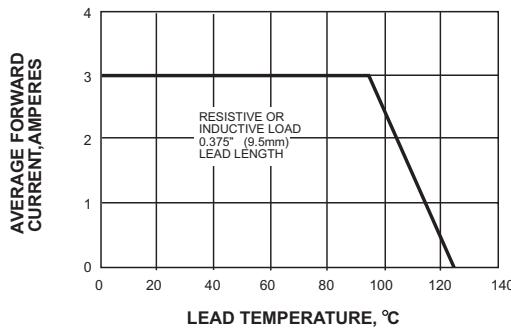


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

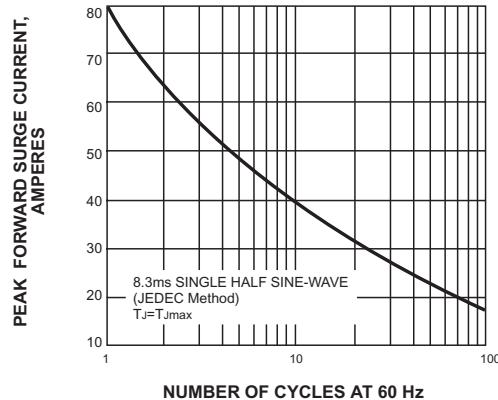


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

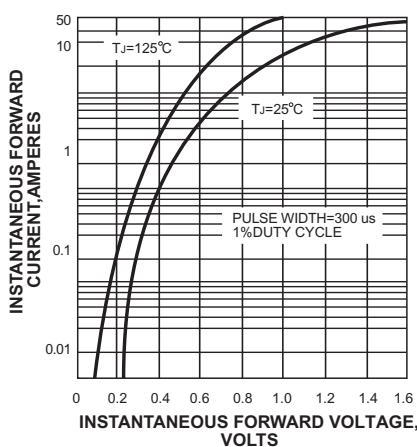


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

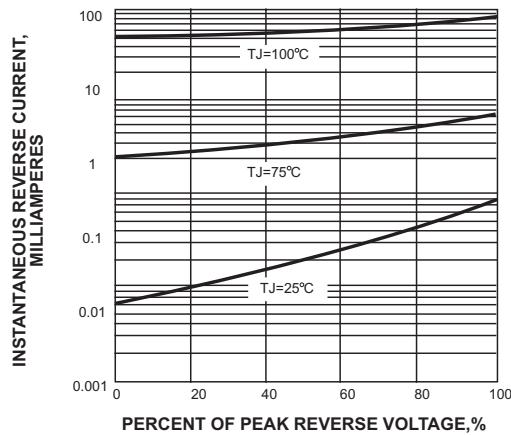


FIG. 5-TYPICAL JUNCTION CAPACITANCE

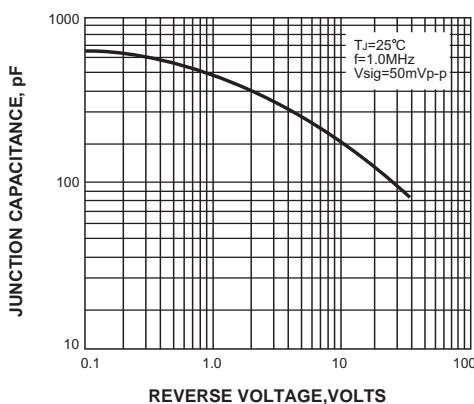


FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

