

## II. Schottky Rectifier

### 2.0A Schottky Rectifier SK220~SK2200

(Package: DO-41)

<p><b>FEATURES</b></p> <ul style="list-style-type: none"> <li>The plastic package carries Underwriters Laboratory Flammability Classification 94V-0</li> <li>Metal silicon junction, majority carrier conduction</li> <li>Low power loss, high efficiency</li> <li>High forward surge current capability</li> <li>High temperature soldering guaranteed</li> </ul> <p><b>MECHANICAL DATA</b></p> <ul style="list-style-type: none"> <li>Case : JEDEC DO-41 molded plastic body</li> <li>Terminals : Plated axial leads, solderable per MIL-STD-202E, Method 208C guaranteed</li> <li>Polarity : Color band denotes cathode end</li> <li>Mounting Position : Any</li> <li>Weight : 0.33 grams, 0.012 ounce</li> </ul>	<p>Case: DO-41 Dimensions in inches and (millimeters)</p>
--	---


## Ratings & Electrical Characteristics

Characteristic	Symbol	SK 220	SK 230	SK 240	SK 250	SK 260	SK 280	SK 2100	SK 2150	SK 2200	Units				
Maximum recurrent peak reverse voltage	V <sub>RRM</sub>	20	30	40	50	60	80	100	150	200	Volts				
Maximum RMS voltage	V <sub>RMS</sub>	14	21	28	35	42	56	70	105	140	Volts				
Maximum DC blocking voltage	V <sub>DC</sub>	20	30	40	50	60	80	100	150	200	Volts				
Maximum average forward rectified current at derating lead temperature	I <sub>O</sub>	2.0								Amps					
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	60								Amps					
Maximum instantaneous forward voltage at 2.0A DC	V <sub>F</sub>	0.55		0.70		0.85		Volts							
Maximum average reverse current Ta = 25°C at rated DC blocking voltage	I <sub>R</sub>	0.2								mA					
		2													
Typical thermal resistance (Note 1)	R <sub>th-JA</sub>	45								°C/W					
	R <sub>th-JL</sub>	15													
Typical junction capacitance (Note 2)	C <sub>j</sub>	180								PF					
Operating junction temperature range	T <sub>j</sub>	150								°C					
Storage temperature range	T <sub>stg</sub>	-55 to +150								°C					


Notes:

- Thermal resistance : At 9.5mm lead lengths, PCB mounted.
- Measured at 1 MHz and applied reverse voltage of 4.0 volts.


## Ratings and Characteristic Curves of SK220~SK2200

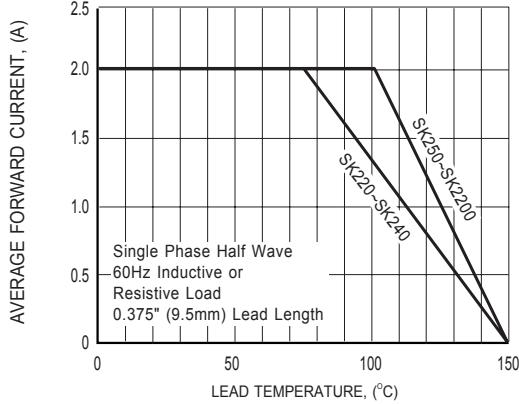


**FIG.1 TYPICAL FORWARD CURRENT DERATING CURVE**

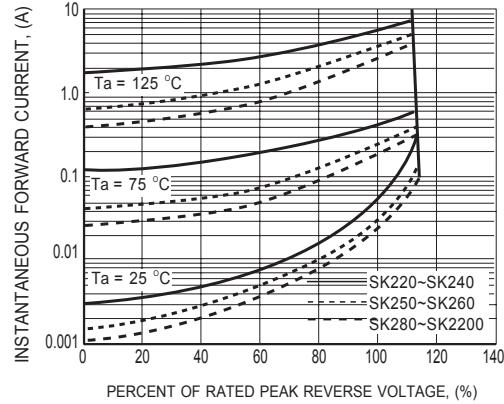


**FIG.2 TYPICAL REVERSE CHARACTERISTICS**

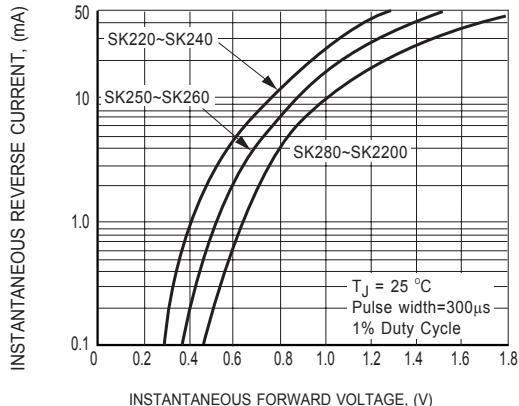

**FIG.3 TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS**

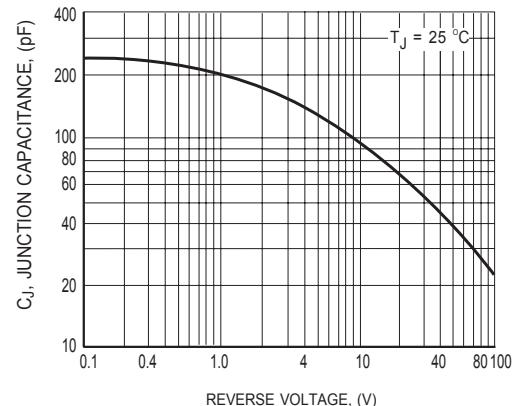

**FIG.4 TYPICAL JUNCTION CAPACITANCE**

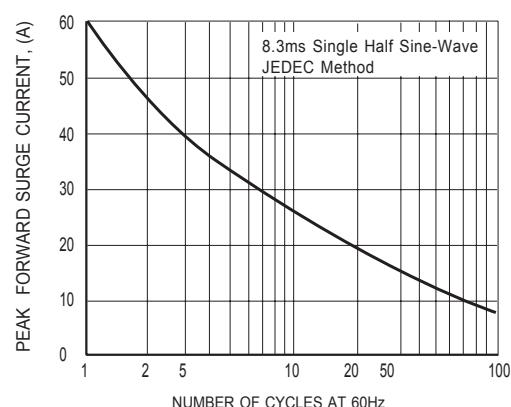

**FIG.5 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT**